


# System Advanced Command Scripts

Command scripts are used to execute a command

- PreInit - After initializing the kernel
- PostInit - After starting all services
- Shutdown - Before shutting down XigmaNAS


This feature is for advanced user. It isnt needed for the daily work of your XigmaNAS server.

The example on the screenshots will copy all logfiles to /mnt/data/log-date

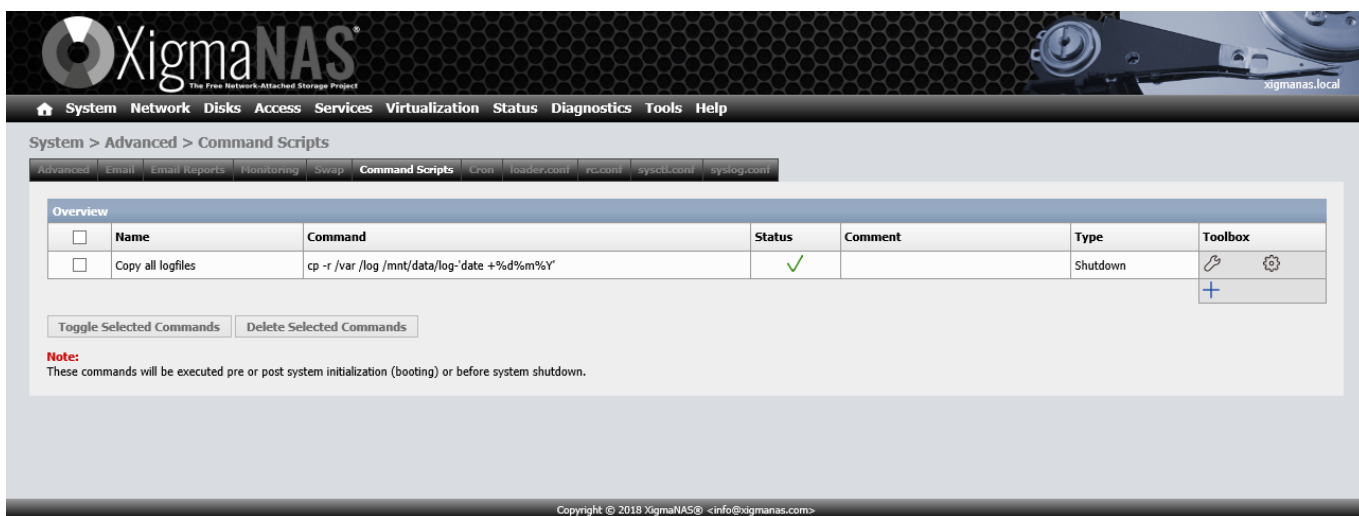

Click on the + icon to create a new Command.

Click on the 🔧 icon to manage an existing Command.

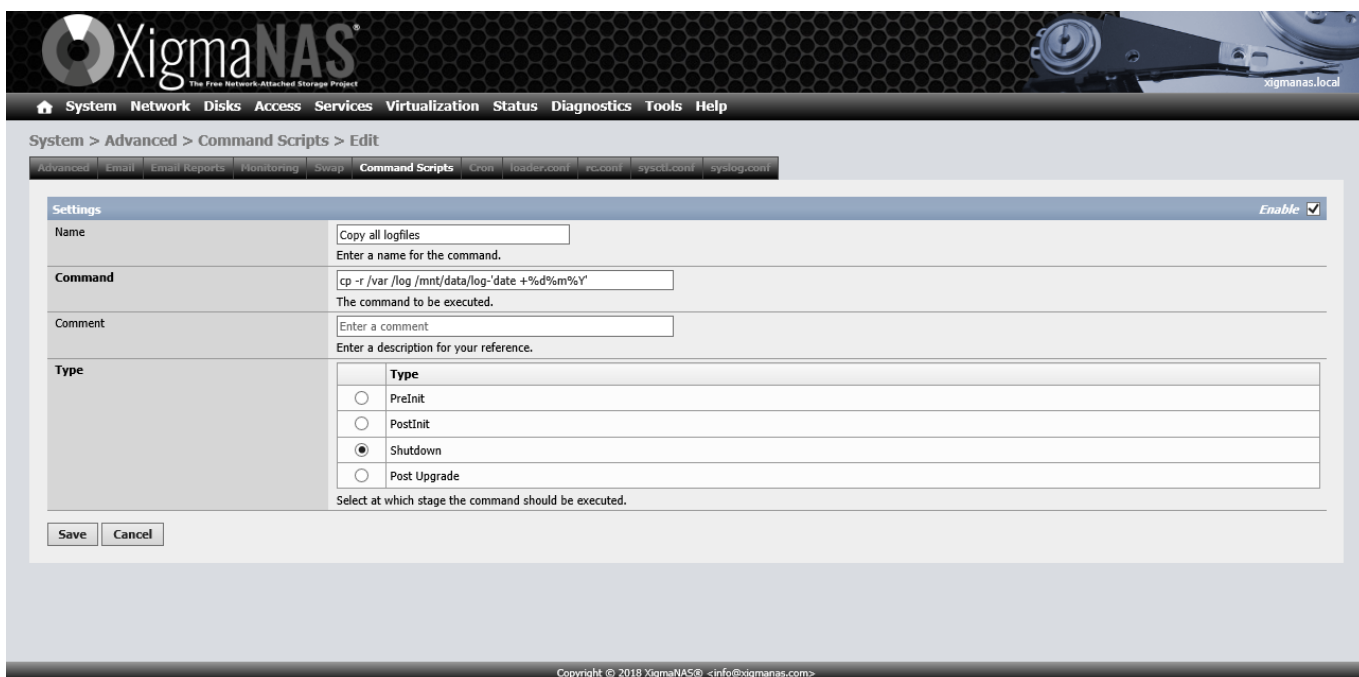

Other examples:

**Command:**

`fsck_ufs -y /dev/da1`

**Type:**

Shutdown

This will do a filesystem check to the given drive before the system shutdown.

From:

<https://www.xigmanas.com/wiki/> - XigmaNAS

Permanent link:

[https://www.xigmanas.com/wiki/doku.php?id=documentation:setup\\_and\\_user\\_guide:system\\_advanced\\_command\\_scripts](https://www.xigmanas.com/wiki/doku.php?id=documentation:setup_and_user_guide:system_advanced_command_scripts)

Last update: **2018/09/30 02:05**

