


# System Advanced Command Scripts

Command scripts are used to execute a command

- PreInit - After initializing the kernel
- PostInit - After starting all services
- Shutdown - Before shutting down NAS4Free


This feature is for advanced user. It isnt needed for the daily work of your NAS4Free.

The example on the screenshots will copy all logfiles to /mnt/data/log-19012017

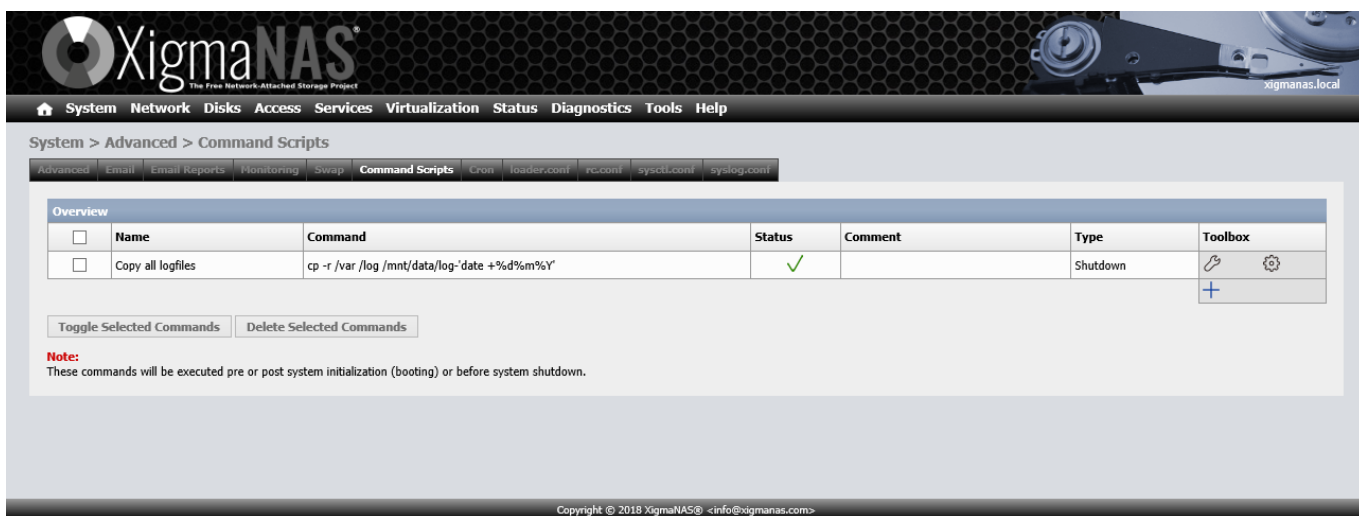

Click on the + icon to create a new Command.

Click on the 🔗 icon to manage an existing Command.

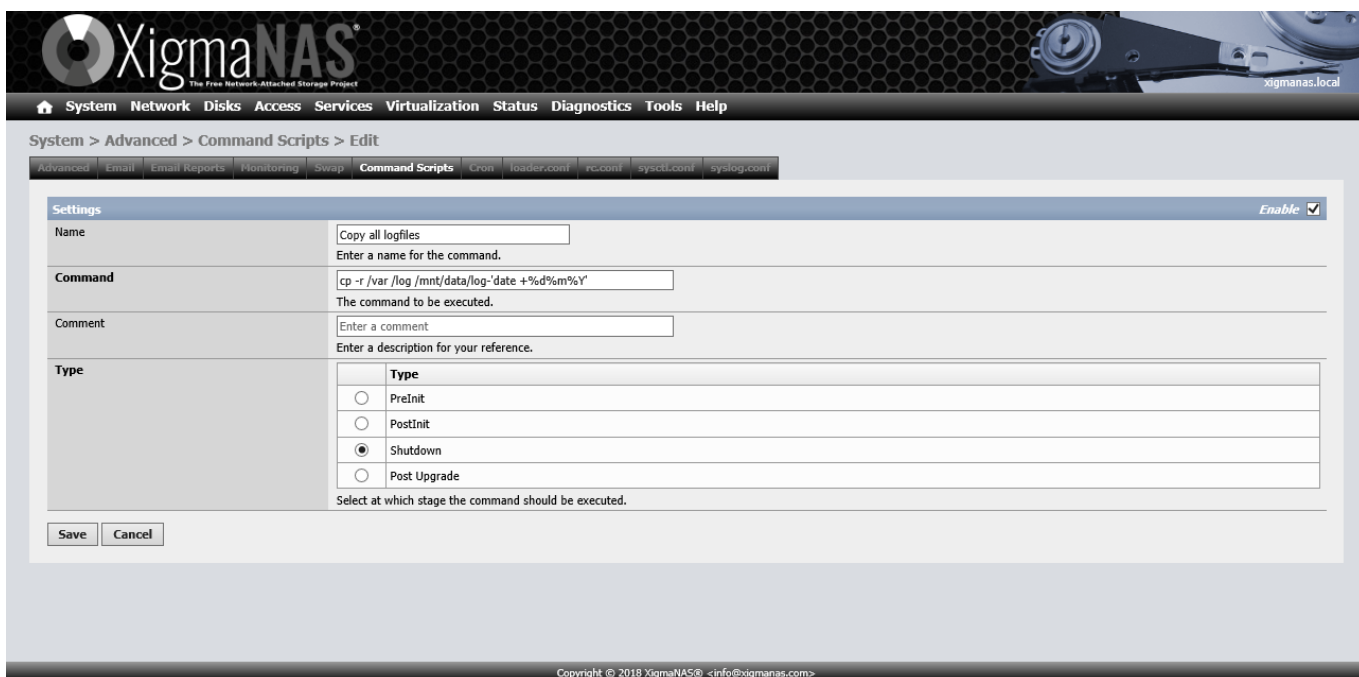

Other examples:

**Command:**

`fsck_ufs -y /dev/ada1`

**Type:**

Shutdown

This will do a filesystem check to the given drive before the system shutdown.

From:

<https://www.xigmanas.com/wiki/> - XigmaNAS

Permanent link:

[https://www.xigmanas.com/wiki/doku.php?id=documentation:setup\\_and\\_user\\_guide:system\\_advanced\\_command\\_scripts&rev=1484887889](https://www.xigmanas.com/wiki/doku.php?id=documentation:setup_and_user_guide:system_advanced_command_scripts&rev=1484887889)

Last update: **2018/07/08 17:50**

